




IP66 RoHS IK08

Colour temperature

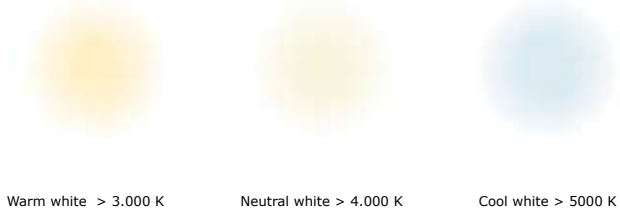

Models




Single


Double



Light distributions

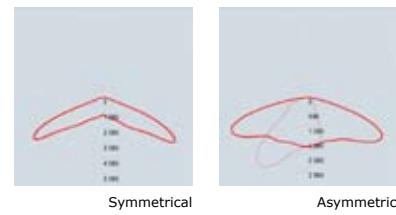

Dimension



- \*Housing accommodates up to 5 LED lighting units (LED Board: 32 / 48 / 64 / 80 LED)
- \*Current feed: 200 mA-1500 mA, depending on ambient temperature
- \*Electronic operating device with DALI interface, 1-10 V or stand-alone programming
- \*Various light distributions for area, high bay, street or walkway lighting
- \*Lens made from PMMA, with aluminum support plate
- \*Cover in single-pane safety glass
- \*Die-cast aluminum housing, pole adapter made of aluminum, swivels from 0 to 90° in 5° increments, for pole □ 60 mm
- \*Finish: polyester

LED		Lumen	AC/DC	Pole Height	Pole Top
30 W	DALI controllable	3600	√	3000-5000	60
40 W	DALI controllable	4800	√	4000-6000	60
60 W	DALI controllable	7200	√	5000-8000	60
80 W	DALI controllable	9600	√	6000-10000	60
120 W	DALI controllable	14400	√	8000-12000	60

